OPALE TOUCH

Технические характеристики



По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231 Ангарск (3955)60-70-56 Архангельск (8182)63-90-72 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Благовещенск (4162)22-76-07 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Владикавказ (8672)28-90-48 Владимир (4922)49-43-18 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89 Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48

Россия +7(495)268-04-70

Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Коломна (4966)23-41-49 Кострома (4942)77-07-48 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Курган (3522)50-90-47 Липецк (4742)52-20-81 Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Ноябрьск (3496)41-32-12 Новосибирск (383)227-86-73

Киргизия +996(312)-96-26-47

Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16 Петрозаводск (8142)55-98-37 Псков (8112)59-10-37 Пермь (342)205-81-47 Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Саранск (8342)22-96-24 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13 Сургут (3462)77-98-35

Казахстан +7(7172)727-132

Сыктывкар (8212)25-95-17 Тамбов (4752)50-40-97 Тверь (4822)63-31-35 Тольятти (8482)63-91-07 Томск (3822)98-41-53 Тула (4872)33-79-87 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Улан-Удэ (3012)59-97-51 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Чебоксары (8352)28-53-07 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Чита (3022)38-34-83 Якутск (4112)23-90-97 Ярославль (4852)69-52-93



The Opale Touch oven is ideal for traditional deck baking, thanks to a perfectly even distribution of heat in the baking chambers and the independent adjustment of deck and top temperatures.

Versatile, it will be the ally of all your products, even the most refined.

3 POWER LEVELS
1 TO 12 DOORS

3 TO 5 LEVELS

2 LOADING WIDTHS

BAKING SURFACE FROM 3,55 TO 21,4M²



KNOW-HOW

More than 70 years by your side



With more than 70 years of experience, Pavailler has reached its high level of expertise thanks to a unique know-how in the conception of ovens for bakeries and pastry shops, and a development of Made in France products, always more reliable and efficient.

VISIT WWW.PAVAILER.COM

LAB

Discover your future oven



As a demonstration and training center, our LAB' is at your disposal to test our equipment in real-life situations. Our Baker Demonstrator is there to advise and assist you.

MAKE AN APPOITMENT WITH US +33 (04) 75 57 55 00

ASSISTANCE

At your service



Benefit from the power of a worldwide network of distributors! We provide local support to bakers all over the world, to help you at every stage of your project.

CALL US +33 (04) 75 57 55 00

DECK OVEN OPALE TOUCH

The OPALE TOUCH range of electric deck ovens is composed of models available from 1 to 3 doors, in 3, 4 or 5 levels, in 3 depths (1600, 2000 and 2400mm) and in 2 loading widths:

870 mm - Y13, Y14 and Y15.

720 mm - Y13, Y14, Y23, Y24, Y33 and Y34.

THE RANGE





FILTER CARTRIDGE BRITA INCLUDED



Opale ovens are protected against limescale by a BRITA water filter cartridge. This ensures safe and continuous operation.



WARRANTY PERIOD 2 YEARS

Pavailler offers a 2 year warranty on Opale Touch deck ovens.




BAKING CHAMBER

- Large baking surface for a small footprint.
- Independent deck and top control, adjustable on the Easy Touch control panel.
- Resistance layer embedded in sheet metal in the baking length, guaranteeing maximum protection against impact and optimum heat distribution.
- Protected temperature sensors.
- « Hot air curtain » effect thanks to front-mounted resistors.
- 20mm thick tiles.
- Steam diffusion from the back to the front guarantees a perfect homogeneity on all your products.
- Safety thermostat on each floor.
- Optimal electrical efficiency for energy savings.
- Double lighting on each floor.
- Removable windows with 2 knobs.
- Damper on the last deck as standard (on all decks as an option).



BAKING CHAMBER



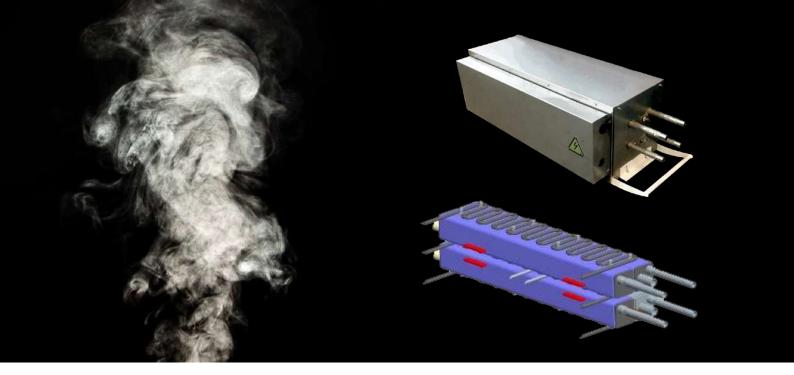

STEAM GENERATOR

LOW MOTION

Based on a Low Motion low-pressure design, the new Opale range steam generator guarantees a perfect optimization of the exchange and an excellent performance.

Designed to provide an ideal operating ratio allowing a quick temperature recovery before each new injection, it will satisfy the most demanding bakers: no need to opt for a reinforced steam, Low Motion has been designed to perfectly meet your steam needs according to your oven model.

(ECONOMICAL

Save your resources: Low Motion technology allows you to save water and energy. With a low and controlled hourly consumption, **energy savings of between 6 and 13%** can be achieved.

RESISTANT

The thickness of the materials used and the quality of the finish guarantee **robustness**, **watertightness and longevity** and prevent any risk of leakage or collapse of your steam generator.

SAFETY

A safety thermostat is present in the steam generator.

M OPTIMUM

Low Motion steam generators are more sober in every aspect, but they do not compromise on the volume of steam generated: thanks to their **high vaporization capacity and low pressure drop,** a generous steam covers your products evenly, guaranteeing a shiny and appetizing appearance of your bread!

■× SILENT

Its low-pressure operation also makes it the quietest steam generator on the market! At only 55 decibels per injection, less noisy than the hood extractor, you will barely hear it.

TECHNICAL FEATURES



ROBUST AND NEAT FINISHES.
BRUSHED STAINLESS STEEL
FRONT

EXHAUST HOOD WITH EASILY REMOVABLE GRIDS FOR CLEANING

HALF-OPENING OF NON-LOCKED VENTS THANKS TO THE EXCLUSIVE F PAVAILLER SYSTEM

INTEGRATED ELEVATOR (OPTIONAL), REVERSIBLE.

FACILITATES PASSAGE AND FREES UP SPACE IN THE OVERHEAD STORAGE POSITION





AND UNLOADING PRODUCTS. THE LOADER AUTOMATICALLY OPENS THE GLASS PANES AS IT PASSES, FOR QUICK AND EASY HANDLING.




THE DESIGN OF THE HOOD IS MADE OF SOLID VOLUMES, WITHOUT ASPERITIES WHERE DUST AND FLOUR COULD GET LODGED.



THE DESIGN OF THE ALTAR TABLE IS UNCLUTTERED, WITH NO SUPERFICIAL ELEMENTS, IN ORDER TO FACILITATE THE DAILY MAINTENANCE OF THE OVEN.

ENERGY SAVINGS

Baking is the most energy consuming item and therefore represents the main lever on which to act in priority in order to reduce your energy bill.





OPALE TOUCH ENERGY GUIDE

OPALE TOUCH has been designed with the objective of controlling and optimizing energy consumption.

Its conception limiting heat loss, the intelligent control of its electronic command, as well as the sobriety of its steam devices, are all tools allowing you to reduce your energy consumption, without compromising on the quality of baking.



Low Motion steam generator

The **Low Motion** technology allows you to save water and energy thanks to a slower water diffusion and a better evaporation.

These are energy savings of between 6 and 13%, or 12 kWh per day (on an Opale Y13, Y14, Y23 or Y24).

OUR ADVICE

Moderate steam injections and remember to use the recipes programmed on the Easy Touch.



Delayed start

Independently and flexibly program the heating of each deck with the **delayed start** on the Easy Touch.

Save on preheating by delaying the start of each deck by 10 minutes. On a four-deck oven, this represents a saving of **253 hours per year**.

OUR ADVICE

Shift the delayed start from one deck to the next according to the order of the first batches.



ECO mode

The **ECO function** of the Easy Touch control allows the management of the priority between the decks in order to optimize the energy consumption of the oven.

OUR ADVICE

Use the ECO button when a deck is not used much or at all.

GOOD PRACTICES

- After 30 minutes without baking, cut off one deck or the entire oven.
- Decrease your baking temperature by 5°C.
- Group your batches to fill your oven and improve your yield (on average, on a production run, a 2 door oven is only 50% occupied).
- **Defrost the products** before baking.

- Calculate the required preheating time taking into account the different possible flow temperatures.
- Turn off your oven10 minutes before the end of your last baking (use falling heat for products requiring low temperatures)
- Turn off the lights on unused floors.

THINK ABOUT MAINTENANCE

- Clean the glass doors of your oven and its lighting.
- **Descale** the injection tubes of your steaming devices.
- Check the condition of door seals and insulation panels.



Energy distribution

The Easy Touch control manages energy savings by optimizing the heating time of each baking chamber and the steam generator.

This management system optimizes the total power of the oven while maintaining **excellent responsiveness** at each stage.



Insulation

Thermal insulation is provided by rock wool panels up to 150 mm thick depending on the panels, for increased insulation and optimum energy efficiency.



3 power levels

OPALE Touch has 3 power levels, adaptable to your production needs.

1 sun	2 suns	3 suns
Kg of dough,	/hour/m² of bal rage	cing on ave-
13 kg	15 kg	18 kg
To bake 100	O baguettes on	Y14 (5 m²)
5,4 h 129 kWh	4,7 h 127 kWh	4,1 h 156 kWh

EASY TOUCH CONTROL

RELIABLE AND INTUITIVE

A modern and intuitive control system for easy regulation of your baking.

The reading is instantaneous and the navigation is done with a simple fingertip, without complexity and with all the necessary parameters to express your know-how in each batch.











RECIPE BOOK

The Recipe Book contains **50 programs** that allow you to save your baking settings and access your favorite recipes in an instant.

They can even be programmed with **5 different temperature levels.**



ECO MODE

The Eco Mode allows you to **save on your electricity bills** without penalizing the baking temperature and the quality of your products.

This mode allows you to **manage the priority between decks**, and allows you to save money and not exceed a consumption threshold.



EXPERT MODE

Expert Mode lets you enter advanced visualization menus to monitor internal temperatures and oven technical data.



+1 TOUCH

With a single touch, you can **adjust the baking time**.

DATA AND DIMENSIONS

OPALE TOUCH Y13 / Y14 / Y15

	Y13/72		Y13/87			Y14 / 72			Y14/87			Y15 / 87			
	1600	2000	2400	1600	2000	2400	1600	2000	2400	1600	2000	2400	1600	2000	2400
Number of doors per deck		1		1		1			1			1			
Number of decks		3		3			4			4			5		
Useful width of the doors (mm)		720		870			720			870			870		
Useful baking depth (mm)	1600	2000	2400	1600	2000	2400	1600	2000	2400	1600	2000	2400	1600	2000	2400
Baking surface (m²)	3,57	4,46	5,35	4,20	5,25	6,30	4,76	5,94	7,13	5,60	7,00	8,40	7,00	8,75	10,50
Electrical power without steam generator (kW)*	11,00	13,00	14,00	13,00	15,00	18,00	18,00	21,00	23,00	21,50	24,50	28,00	25,70	29,20	33,20
Electrical power with steam generator (kW)*	20,97	22,97	23,97	22,97	24,97	27,97	27,97	30,97	32,97	31,47	34,47	37,97	33,51	37,01	41,01
Average hourly consumption in normal use (kWh)	5,01	6,28	7,55	5,93	7,41	8,89	8,62	10,79	12,97	10,16	12,7	15,24	15,32	19,16	22,99
Dimensions LxPxH (mm) with table	1385 2551 2256	1385 2966 2256	1385 3381 2256	1530 2551 2256	1530 2966 2256	1530 3381 2256	1385 2551 2256	1385 2966 2256	1385 3381 2256	1530 2551 2256	1530 2966 2256	1530 3381 2256	1530 2551 2256	1530 2966 2256	1530 3381 2256
Dimensions (H) with extractor**	2662	2662	2662	2662	2662	2662	2662	2662	2662	2662	2662	2662	2662	2662	2662
Useful height of lower decks (mm)	175	175	175	175	175	175	175	175	175	175	175	175	175	175	175
Useful height of upper deck (mm)	225	225	225	225	225	225	225	225	225	225	225	225	225	225	225
Net weight (kg)	1510	1710	1910	1525	1675	1825	2010	2110	2210	1685	1835	1985	1850	2000	2150

OPALE TOUCH Y23 / Y24 / Y33 / Y34

	Y23 / 72			Y24 / 72				Y33 / 72		Y34/72			
	1600	2000	2400	1600	2000	2400	1600	2000	2400	1600	2000	2400	
Number of doors per deck		2		2				3		3			
Number of decks		3		4			3			4			
Useful width of the doors (mm)	1440			1440			2160			2160			
Useful baking depth (mm)	1600	2000	2400	1600	2000	2400	1600	2000	2400	1600	2000	2400	
Baking surface (m²)	7,13	8,92	10,70	9,51	11,89	14,27	10,70	13,37	16,05	14,27	17,83	21,40	
Electrical power without steam generator (kW)*	28,00	31,00	35,00	42,00	47,00	53,00	35,90	43,90	50,40	56,40	67,40	76,90	
Electrical power with steam generator (kW)*	37,97	40,97	44,97	51,97	56,97	62,97	52,52	60,52	67,02	73,02	84,02	93,52	
Average hourly consumption in normal use (kWh)	14,23	17,84	21,45	20,8	25,94	31,2	27,05	33,9	40,76	36,19	45,33	54,47	
Dimensions LxPxH (mm) with table	2110 2551 2256	2110 2966 2256	2110 3381 2256	2110 2551 2256	2110 2966 2256	2110 3381 2256	2825 2551 2256	2825 2966 2256	2825 3381 2256	2825 2551 2256	2825 2966 2256	2825 3381 2256	
Dimensions (H) with extractor**	2662	2662	2662	2662	2662	2662	2662	2662	2662	2662	2662	2662	
Useful height of lower decks (mm)	175	175	175	175	175	175	175	175	175	175	175	175	
Useful height of upper deck (mm)	225	225	225	225	225	225	225	225	225	225	225	225	
Net weight (kg)	2710	2860	3010	3110	3210	3310	3400	3510	3630	3610	3710	3925	

OPTIONS & ACCESSORIES

	OPTIONS
Table (for models of width 870mm)	€
Damper on all decks	€
Integrated elevator-loader	€
Column elevator-loader	€

^{*3} power levels - oven power can be adjusted according to your needs.
** Height given with extractor in vertical position, possibility to put it in horizontal position.

^{*3} power levels - oven power can be adjusted according to your needs.
** Height given with extractor in vertical position, possibility to put it in horizontal position.

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231 Ангарск (3955)60-70-56 Архангельск (8182)63-90-72 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Благовещенск (4162)22-76-07 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Владикавказ (8672)28-90-48 Владимир (4922)49-43-18 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89 Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Россия +7(495)268-04-70

Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Коломна (4966)23-41-49 Кострома (4942)77-07-48 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Курган (3522)50-90-47 Липецк (4742)52-20-81 Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Ноябрьск (3496)41-32-12 Новосибирск (383)227-86-73

Киргизия +996(312)-96-26-47

Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16 Петрозаводск (8142)55-98-37 Псков (8112)59-10-37 Пермь (342)205-81-47 Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Саранск (8342)22-96-24 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13 Сургут (3462)77-98-35 Казахстан +7(7172)727-132

Тверь (4822)63-31-35 Тольятти (8482)63-91-07 Томск (3822)98-41-53 Тула (4872)33-79-87 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Улан-Удэ (3012)59-97-51 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Чебоксары (8352)28-53-07 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Чита (3022)38-34-83 Якутск (4112)23-90-97 Ярославль (4852)69-52-93

Сыктывкар (8212)25-95-17

Тамбов (4752)50-40-97